

## Watermarking on Bit Plane Arranged Images

Gwanggil Jeon

*Department of Embedded Systems Engineering, Incheon National University  
12-1 Songdo-dong, Yeonsu-gu, Incheon 406-772, Korea  
[gjeon@incheon.ac.kr](mailto:gjeon@incheon.ac.kr)*

### **Abstract**

*In this paper we propose a new bit plane-based watermarking approach. In the proposed technique, an image is embedded in the least significant bit (LSB) plane of the original image. The selection of bit planes is a crucial issue because the performance and file size is determined by the selected bit plane. We used ten LC dataset for the experiments. From the simulation results, it is obvious that the presented method is reliable for watermarking.*

**Keywords:** *bit plane decomposition, digital color image, watermarking, image size*

### **1. Introduction**

A watermarking is a hidden but identifiable pattern in an image. A bit plane of a digital discrete image is a set of bits point to a presented bit plane in each of the binary numbers describing the images [1]. Images can be represented in a sequence of binary images by decomposing them into their eight bit planes. The 0<sup>th</sup> bit plane contains the end bit of each image, and the last bit gives the least impact in the sense of the significance of the value, it is known the least significant bit (LSB). On the other hand, the plane with the  $(n-1)$ <sup>th</sup> bit of each image is called most significant bit (MSB). However, if an image is with gray level or a particular channel of color images, eight differently assigned binary images can be obtained. Thus when an image is colored one, eight different binary images can be obtained in each color channel. For  $n$ -bit image case, there are  $n$  bit planes to represent the image. Here the 0<sup>th</sup> bit plane tells the set of the LSB, and the  $(n-1)$ <sup>th</sup> contains the MSB. We can say the 0<sup>th</sup> bit plane yields the least contribution to the image. And the  $(n-1)$ <sup>th</sup> bit plane shows the coarsest information. If a bit on a  $p$ <sup>th</sup> bit plane on an  $q$ -bit image is set to 1, it gives a value of  $2^{(q-p)}$ . Thus, bit plane can give half of the contribution of the earlier bit plane.

Few researches have been developed [2-5]. Especially the authors in [2] inserted the watermark in the LSB bit plane and [3] presented bit plane handling of the LSB approach and utilized quasi  $m$ -arrays in place of pseudorandom noise as a watermarking. In [4], the authors conversed pseudo-random LSB watermarking, and emphasized the previous works [5] where in LSB adjustments are adopted. They commented that LSB adjustments approach is less reliable nor robust and not much transparent [6-27].

In this paper, we present a watermarking process and analysis the impact between performance and image size, and find the best tradeoff relationship. The paper is divided as follows. In Section 2, concept of bit plane representation is described. In Section 3, the

proposed watermarking process is presented. The simulation results are presented in Section 4. Finally, in Section 5, we present our conclusions.

## 2. Concept of bit plane representation

A bit plane is an important tool in image processing to manipulate images. Particularly image watermarking can be conducted through bit plane [2-5]. In bit plane, there are only two levels, either 0 or 1, thus each bit plane can be represented by only 1 bit. In 8 bit image system, each image can be separated into 8 binary planes, and we assume the 0<sup>th</sup> plane as the least significant bit and the 7<sup>th</sup> plane as the most significant bit. Figure 1 shows an example of this concept. As we can see the 7<sup>th</sup> bit plane is the most important and 0<sup>th</sup> bit plane is the least important. In other words, images are still natural without 0<sup>th</sup> bit plane. We denote  $i^{\text{th}}$  plane as  $/3_i$ , where  $i=[0,1,2,\dots,7]$ . Each  $/3_i$  is either 1 or 0. Figure 2 shows eight bit plane images  $/3_i$ , from  $/3_0$  to  $/3_7$ . The bit plane,  $/3_i$ , levels are determined as Eq. (1),

$$(1)$$

where  $im$  is original image to be watermarked, input signal,  $\textcircled{R}$  is *remainder process*,  $/3_i$  is bit plane information at  $i^{\text{th}}$  plane, and  $\text{cD}$  is *round process* which returns the results which are closer to either upper or lower integer number. For example,  $\textcircled{R}(20/3)=2$  and  $\text{cD}(15/7)=2$ .

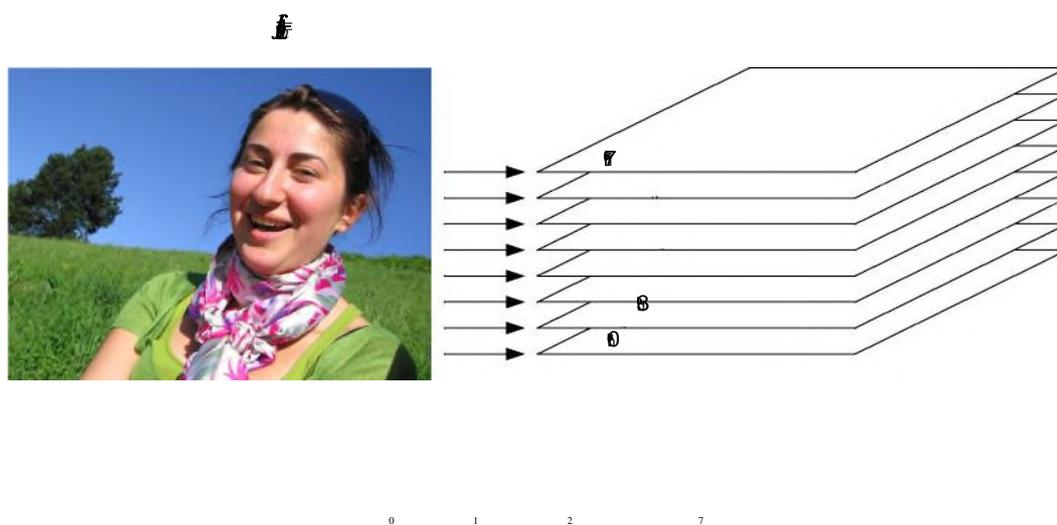


Figure 1. An example of bit plane representation of a tested image. Left: original 13<sup>th</sup> LC image, (b) decomposed eight bit plane

6<sup>th</sup> bit plane  
5<sup>th</sup> bit plane  
4<sup>th</sup> bit plane

2<sup>nd</sup> bit plane

### 3. Watermarking procedure

Watermarking is a crucial step and verification process where a hidden watermark in the image or video contains. The watermarking has been researched to guard digital copyright against unlawful attempt, and protect legal ownership. The best method for watermarking should consider human visual system where human eye is able to discern the watermarked image from the original image.

(2)

Here,  $I_3$  is replaced by watermarked image. Figure 2 shows the results after replacing  $I_3$  with watermarked image.

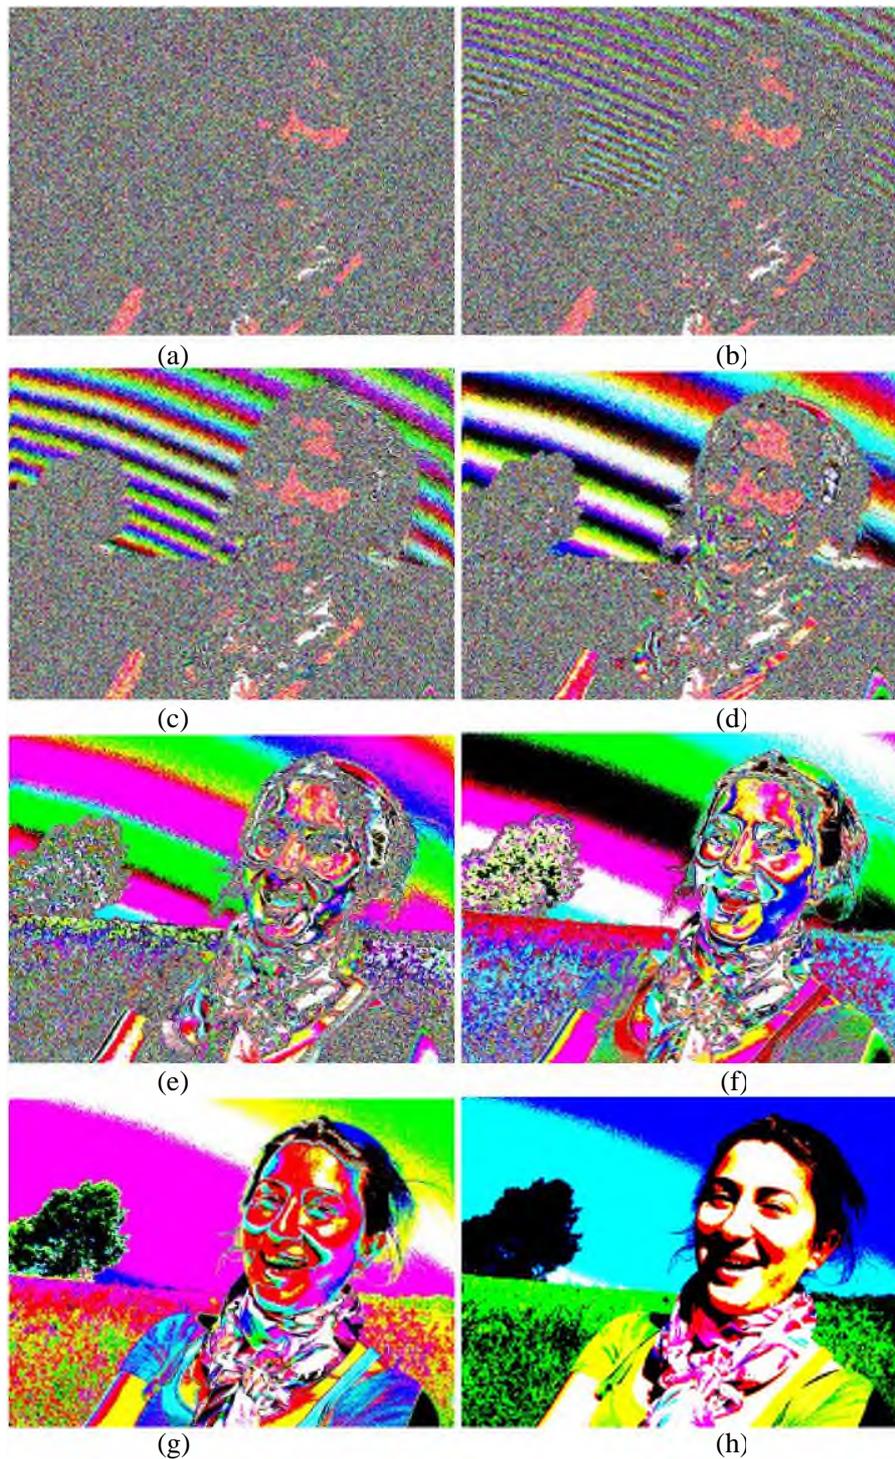
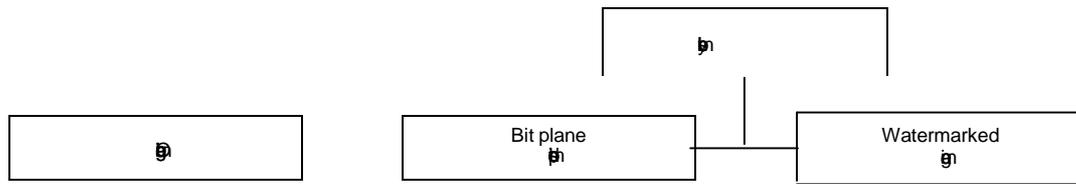


Figure 2. An example of bit plane decomposition using 13<sup>th</sup> LC image. (a) 0<sup>th</sup> bit plane (LSB), (b) 1<sup>st</sup> bit plane, (c) 2<sup>nd</sup> bit plane, (d) 3<sup>rd</sup> bit plane, (e) 4<sup>th</sup> bit plane, (f) 5<sup>th</sup> bit plane, (g) 6<sup>th</sup> bit plane, (h) 7<sup>th</sup> bit plane (MSB)

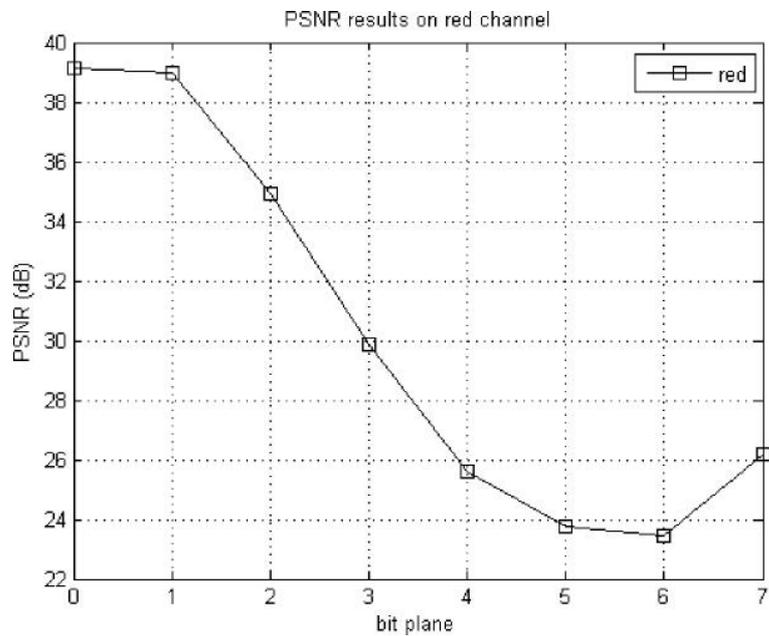


**Figure 3. The procedure of proposed watermarking process**

#### 4. Performance analysis on different $\beta_i$



**Figure 4. Example Watermark Image**



**Figure 5. Average PSNR result in red channel for different  $\beta_i$**

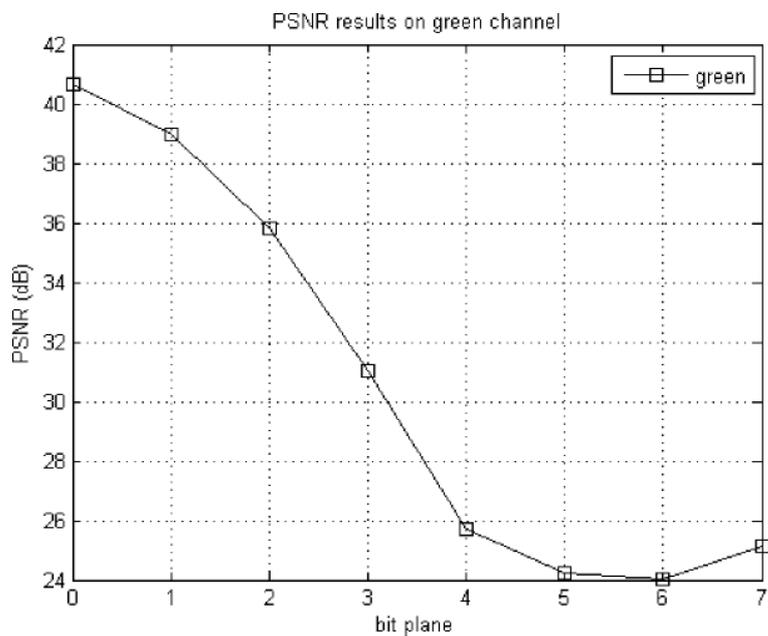


Figure 6. Average PSNR result in green channel for different  $\beta_i$

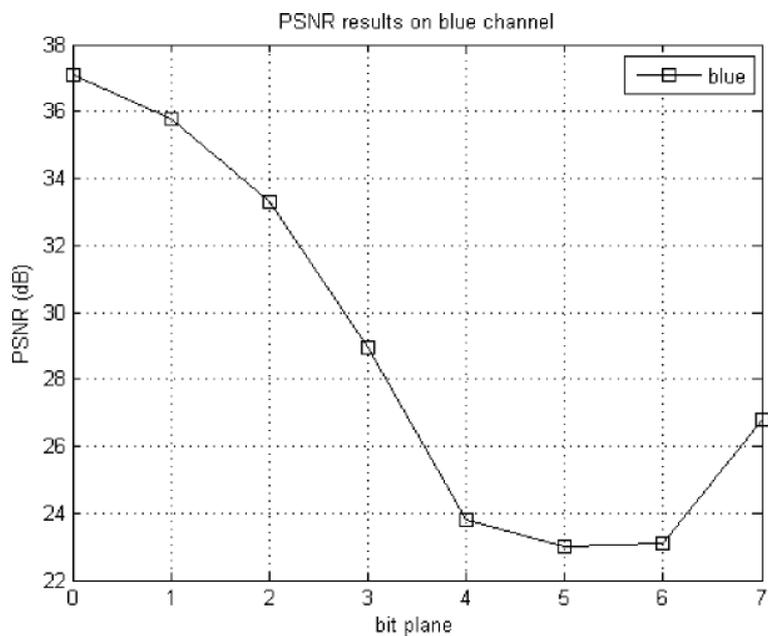


Figure 7. Average PSNR result in blue channel for different  $\beta_i$

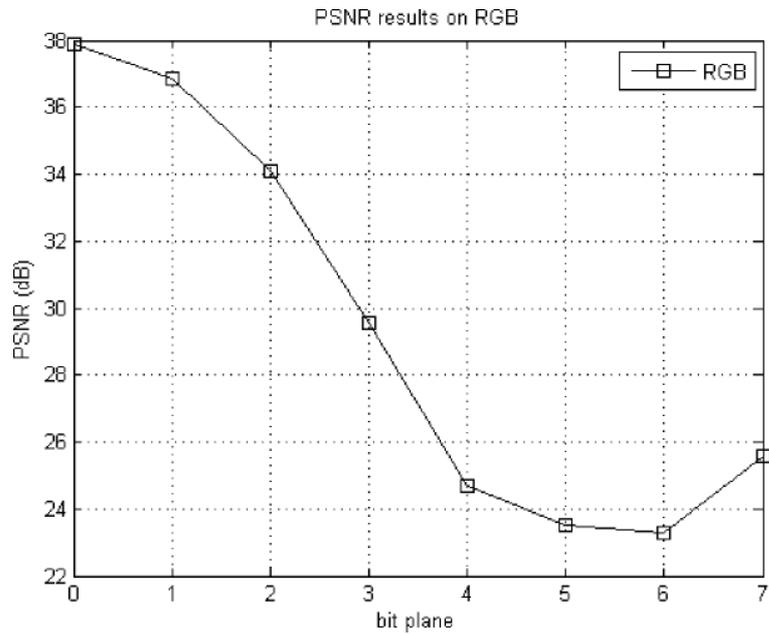


Figure 8. Average PSNR result in RGB color image for different  $\beta_i$

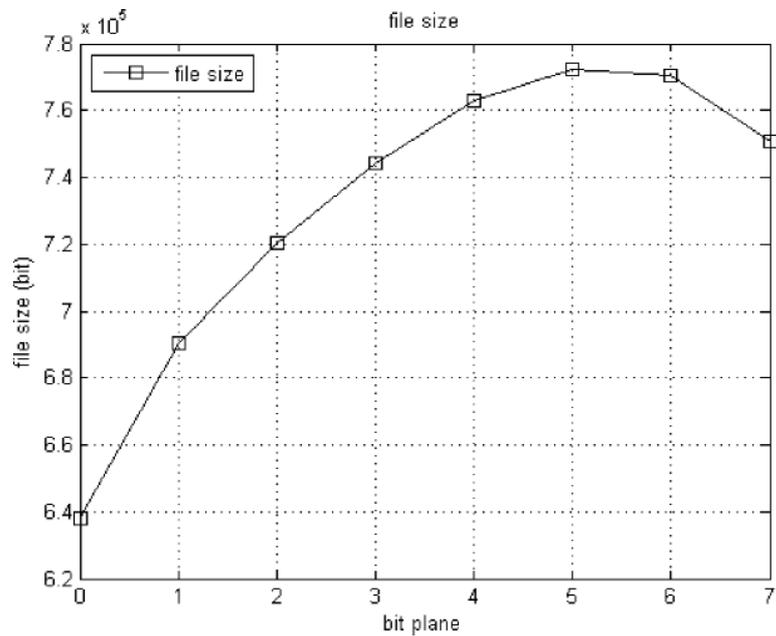


Figure 9. Average file size in RGB color image for different  $\beta_i$

In this section, we conducted bit plane experiments on 150 still color images with dimension of 540×720 which are found here [28].

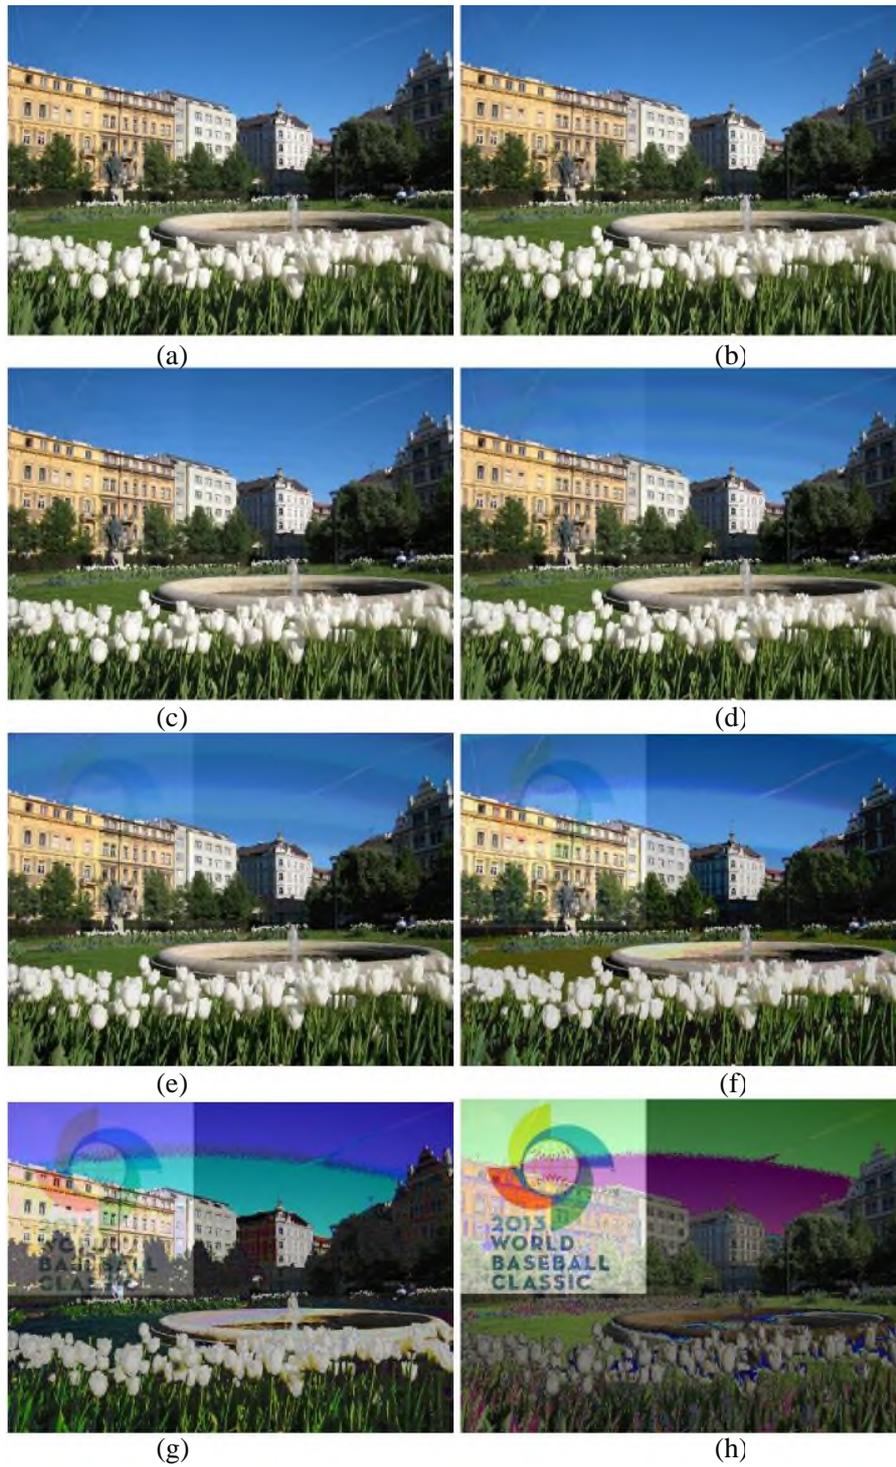
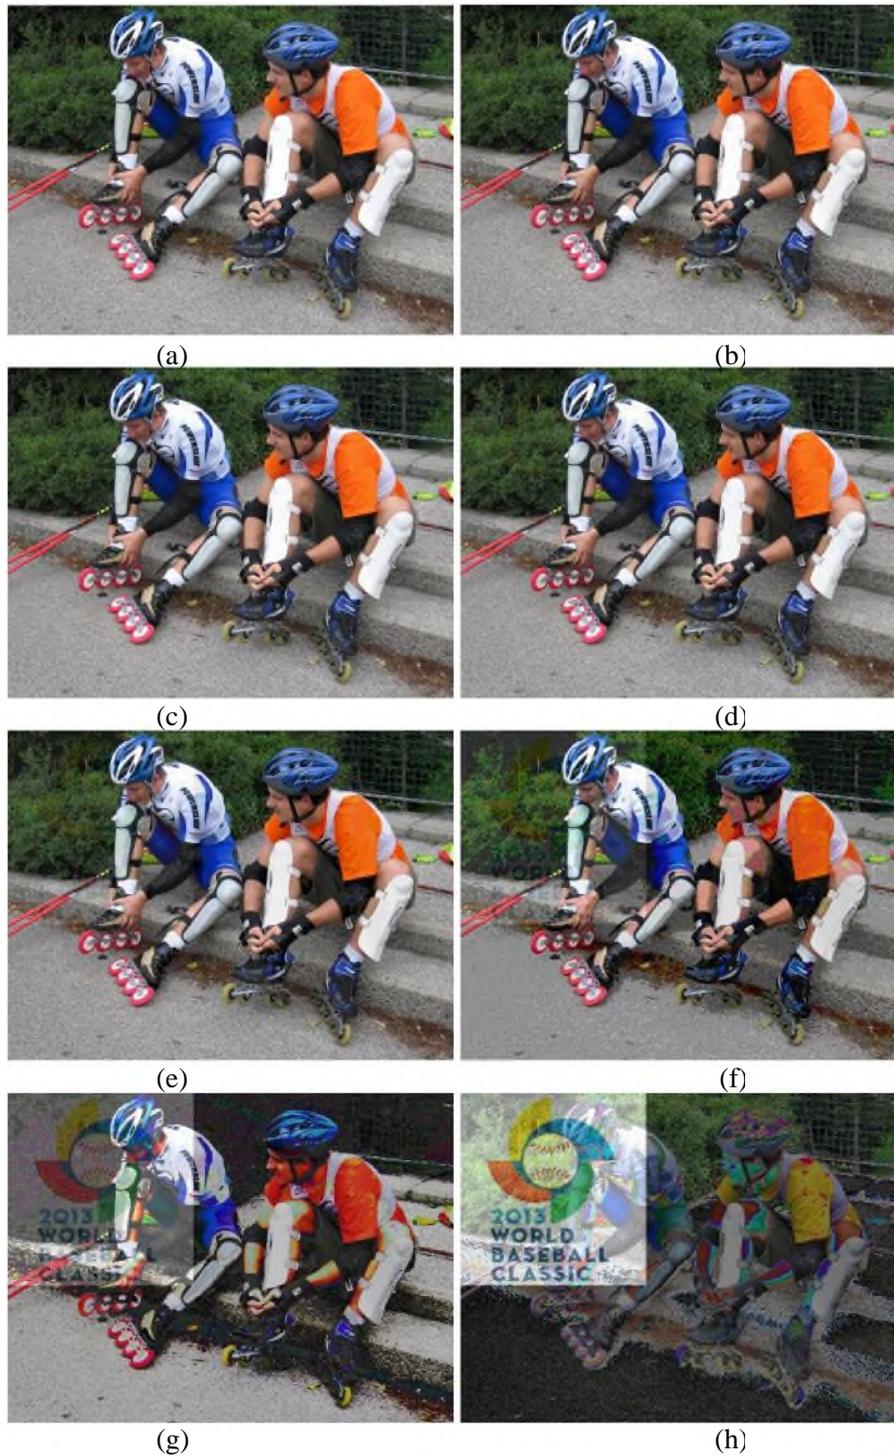


Figure 4. Restored images with watermarking symbol: (a)  $fl_0$ , (b)  $fl_1$ , (c)  $fl_2$ , (d)  $fl_3$ , (e)  $fl_4$ , (f)  $fl_5$ , (g)  $fl_6$ , and (h)  $fl_7$



**Figure 5. Restored images with watermarking symbol: (a)  $fl_0$ , (b)  $fl_1$ , (c)  $fl_2$ , (d)  $fl_3$ , (e)  $fl_4$ , (f)  $fl_5$ , (g)  $fl_6$ , and (h)  $fl_7$**

**Table 1. Simulation results of MSE and filesize results for different  $\beta_0$**

	Red	Green	Blue	RGB	filesize
$\beta_0$	675.3772	672.6097	757.5969	701.8613	638,200
$\beta_1$	413.9517	411.7230	510.2228	445.2992	690,390
$\beta_2$	289.2085	285.5488	429.8558	334.8710	720,500
$\beta_3$	199.1782	172.3839	338.0926	236.5516	744,220
$\beta_4$	251.3440	266.8341	691.8907	403.3562	763,080
$\beta_5$	308.2963	262.9494	354.9389	308.7282	772,460
$\beta_6$	349.8597	277.7686	339.7654	322.4645	770,190
$\beta_7$	168.6782	237.7893	159.9303	188.7993	750,830

In the subsections to follow extensive analysis is carried out to evolve the optimal combination of bit planes (image and watermark) to achieve desirable properties after watermarking. The PSNR results are provided for each combination of the bit planes. We adopt a well-known dissimilarity criterion called peak signal-to-noise ratio (PSNR) in decibels (dB)

$$\text{PSNR}(im_1, im_2) = \frac{255^2}{MSE(im_1, im_2)} \quad (3)$$

$$MSE(im_1, im_2) = \frac{1}{M \times N} \sum_{m=1}^M \sum_{n=1}^N (im_1(m, n) - im_2(m, n))^2 \quad (4)$$

where  $im_1$  and  $im_2$  are the original and watermarked images, respectively. Also Cox watermarking method and CRC are widely used.

$$sim = \frac{1}{M \times N} \sum_{m=1}^M \sum_{n=1}^N |im_1(m, n) - im_2(m, n)| \quad (5)$$

$$CRC = \frac{\sum_{n=1}^{256} \sum_{m=1}^{256} W(m, n) \cdot W^*(m, n)}{\sum_{m=1}^{256} \sum_{n=1}^{256} W(m, n) \cdot W^*(m, n)} \quad (6)$$

When  $CRC=0$ , we assume it is less robust watermarking. Figures 5-8 show the average PSNR results for three color channels and RGB images. Table 1 shows the average MSE results for eight  $\beta_i$ . As we can see, applying watermark in the least significant bit is always good. The performance goes worse as the  $i$  increases, however the  $\beta_7$  is better choice than  $\beta_6$ . Figure 10 and Figure 11 show watermarked images. From the images we found that  $\beta_3$  is always good selection for watermarking.

## 5. Conclusions

In this paper we presented a new bit plane-based watermarking method. The procedure is to include a symbol in the least significant bit plane of the original image. The performance

comparison was conducted and found to be LSB is the best candidate to be used for watermarking. Experimental results section informs that the proposed method is the most reliable for watermarking.

## Acknowledgements

This work was supported in part by the National Science Foundation of China (NSFC) under Grant 61001100, 61077009.

## References

- [1] M. Petrou and C. Petrou, "Image Processing: The Fundamentals", Wiley, Amsterdam, (2010).
- [2] M. H. Sedaaghi and S. Yousefi, "Morphological watermarking", IEE Electronics Letters, vol. 41 no. 10, (2005) May12, pp. 591-593.
- [3] C. H. Yeh and C. J. Kuo, "Digital watermarking through quasi marrays", Proc.of 25th annual IEE Conf. on Industrial Electronics Society, vol. 1, (1999) November, pp. 459-461.
- [4] G. C. Langelaar, I. Setyawan and R. L. Lagendijk, "Watermarking digital image and video data", IEEE Signal Processing Magazine, (2000) September, pp. 20-46.
- [5] R. G. van Schyndel, A. Z. Tirkel and C. F. Osborne, "A digital watermark", Proc. IEEE Int. Conf. on Image Processing, vol. 2, (1994) November, pp. 86-90.
- [6] J. Wu, A. Paul, Y. Xing, Y. Fang, J. Jeong, L. Jiao and G. Shi, "Morphological dilation image coding with context weights prediction", Signal Processing: Image Communication, vol. 25, no. 10, (2010), pp. 717-728.
- [7] M. Anisetti, C. A. Ardagna, E. Damiani, F. Frati, H. A. Müller and A. Pahlevan, "Web Service Assurance: The Notion and the Issues", Future Internet, vol. 4, no. 1, (2012), pp. 92-109.
- [8] M. Anisetti, C. A. Ardagna, V. Bellandi, E. Damiani, M. Döller, F. Stegmaier, T. Rabl, H. Kosch and L. Brunie, "Landmark-assisted location and tracking in outdoor mobile network", Multimedia Tools Appl., vol. 59, no. 1, no. (2012), pp. 89-111.
- [9] M. Anisetti, C. A. Ardagna, E. Damiani and J. Maggesi, "Security certification-aware service discovery and selection, SOCA, (2012), pp. 1-8.
- [10] M. Anisetti, C. A. Ardagna and E. Damiani, "A Low-Cost Security Certification Scheme for Evolving Services", ICWS, (2012), pp. 122-129.
- [11] M. Anisetti, C. A. Ardagna, V. Bellandi, E. Damiani and S. Reale, "Map-Based Location and Tracking in Multipath Outdoor Mobile Networks", IEEE Transactions on Wireless Communications, vol. 10, no. 3, (2011), pp. 814-824.
- [12] M. Anisetti, C. A. Ardagna, V. Bellandi, E. Damiani and S. Reale, "Advanced Localization of Mobile Terminal in Cellular Network", IJCNS, vol. 1, no. 1, (2008), pp. 95-103.
- [13] C.-T. Hsieh, Y.-K. Wu and K.-M. Hung, "Hybrid Watermarking Scheme for Halftone Images", International Journal of Advanced Science and Technology, (2008), pp. 9-20.
- [14] R. Adipranata, E. Cherry, G. Ballangan and R. P. Ongkodjojo, "Fast Method for Multiple Human Face Segmentation in Color Image", International Journal of Advanced Science and Technology, (2009), pp. 19-32.
- [15] D. Bhattacharyya, A. Roy, P. Roy and T. -h. Kim, "Receiver Compatible Data Hiding in Color Image", International Journal of Advanced Science and Technology, (2009), pp. 15-24.
- [16] M. Drahanský, "Realization of Experiments with Image Quality of Fingerprints", International Journal of Advanced Science and Technology, (2009), pp. 79-88.
- [17] B. V. Ramana Reddy, A. Suresh, M. Radhika Mani and V. Vijaya Kumar, "Classification of Textures Based on Features Extracted from Preprocessing Images on Random Windows", International Journal of Advanced Science and Technology, (2009), pp. 9-18.
- [18] W. Wu, Z. Liu and X. He, "Learning-based super resolution using kernel partial least squares, Image Vision Comput, vol. 29, (2011), pp. 394-406.
- [19] W. Wu, Z. Liu, W. Gueaieb and X. He, "Single-image super-resolution based on markov random field and contourlet transform", J. Electron. Imaging, 20, 023005, (2011).
- [20] W. Wu, Z. Liu and D. Kryš, "Improving laser image resolution for pitting corrosion measurement using markov random field method", Autom. Constr., vol. 21, (2012), pp. 172-183.
- [21] W. Wu, Z. Liu, M. Chen, X. Yang and X. He, "An automated vision system for container-code recognition", Expert Systems with Applications, vol. 39, (2012), pp. 2842-285.

- [22] W. Wu, X. Yang and X. He, "Handwritten numeral recognition by model reconstruction based on manifold learning", The 2007 International Conference on Information Computing and Automation (ICICA'07), (2007).
- [23] J. Wu, C. Liang, J. Han, Z. Hu, D. Huang, H. Hu, Y. Fang and L. Jiao, "A Two-Stage Lossless Compression Algorithm for Aurora Image Using Weighted Motion Compensation and Context-Based Model", Optics Communications, vol. 290, (2012) October 22, pp. 19-27.
- [24] Y. Fang, J. Wu and B. Huang, "2D sparse signal recovery via 2D orthogonal matching pursuit", Science China: Inf. Sci., vol. 55, (2012), pp. 889-897.
- [25] J. Wu, T. Li, T.-J. Hsieh, Y.-L. Chang and B. Huang, "Digital Signal Processor-based 3D Wavelet Error-resilient Lossless Compression of High-resolution Spectrometer Data", Journal of Applied Remote Sensing, vol. 5, 051504, (2011), November 28.
- [26] A. Paul, J. Wu, J.-F. Yang and J. Jeong, "Gradient-based edge detection for motion estimation in H.264/AVC", IET Image Processing, vol. 5, no. 4, (2011), pp. 323-327.
- [27] J. Wu, J. Huang, G. Jeon, J. Jeong and L.C. Jiao, "An adaptive autoregressive de-interlacing method", Optical Engineering, vol. 50, 057001, (2011).
- [28] The LC image dataset, <http://www.gipsa-lab.grenoble-inp.fr/~laurent.condat/imagebase.html>.

## Authors



**Gwanggil Jeon** received his BS, MS, and PhD (summa cum laude) degrees in Department of Electronics and Computer Engineering from Hanyang University, Seoul, Korea, in 2003, 2005, and 2008, respectively.

From 2008 to 2009, he was with the Department of Electronics and Computer Engineering, Hanyang University, from 2009 to 2011, he was with the School of Information Technology and Engineering (SITE), University of Ottawa, as a postdoctoral fellow, and from 2011 to 2012, and he was with the Graduate School of Science & Technology, Niigata University, as an assistant professor. He is currently an assistant professor with the Department of Embedded Systems Engineering, Incheon National University, Incheon, Korea. His research interests fall under the umbrella of image processing, particularly image compression, motion estimation, demosaicking, and image enhancement as well as computational intelligence such as fuzzy and rough sets theories. He was the recipient of the IEEE Chester Sall Award in 2007 and the 2008 ETRI Journal Paper Award.

